


C200F

FIXED BOLLARD BY BRICKWORK

- CUSTOM CONFIGURATION
- 200 mm BURIED TUBE

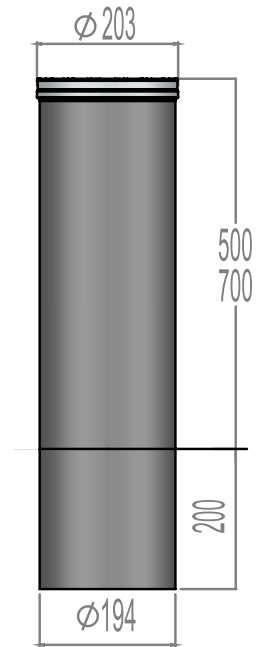

MODEL		C200F FE	C200F FE	C200F INOX
THICKNESS OF THE TUBE	MM	12.5	4	4
DIAMETER OF THE TUBE	MM		200	
MATERIAL OF THE TUBE		FE510	FE360	INOX 304
FINISH OF THE TUBE		POWDER PAINT		SATIN
PROCESSING OF THE TUBE		HOT DIP GALVANIZATION		
REFLECTIVE STRIP			•	
BREAKOUT RESISTANCE	J	169.000	72.000	150.000
IMPACT RESISTANCE	J	15.000	5.000	9.000
ROHS REQUIREMENTS			•	

• = standard equipment

C200F H500	COD	034851212	034850402	034850452
BOLLARD TOTAL WEIGHT (FLAT HEAD)	KG	32	11	16

C200F H500	COD	034351212	034350402	034350452
BOLLARD TOTAL WEIGHT (ALUMINIUM HEAD)	KG	35	14	19

C200F H700	COD	034851214	034850404	034850454
BOLLARD TOTAL WEIGHT (FLAT HEAD)	KG	48	16	21

C200F H700	COD	034351214	034350404	034350454
BOLLARD TOTAL WEIGHT (ALUMINIUM HEAD)	KG	51	19	24