


# CRONO P300

## HYDRAULIC ROAD BLOCKER

- HYDRAULIC CYLINDER
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

MODULAR PRODUCT

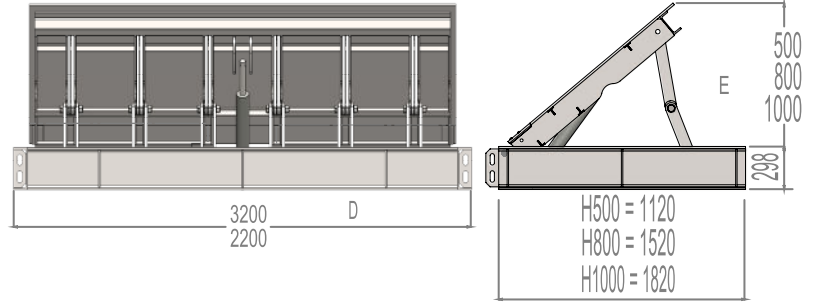

MODEL		CRONO 500	CRONO 800	CRONO 1000
MATERIAL MOVING PLATE			FE360	
FINISH MOVING PLATE			POWDER PAINT	
PROCESSING MOVING PLATE, FOMRWORK AND EXT. STRUCTURE			HOT DIP GALVANIZATION	
REFLECTIVE STRIP			•	
BREAKOUT RESISTANCE	J	800.000	1.800.000	2.000.000
IMPACT RESISTANCE	J		10.000	
STATIC RESISTANCE BOLLARD OPEN (CERTIFIED)	KG		40.000	
DAILY CYCLES INTENSIVE USE (INTERMITTENT CYCLE S3)			2.400	
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE			1.500.000	
MAXIMUM PRESSURE OF WORK	BAR	30		40 - 80
HYDRAULIC PUMP			OPTIONAL	
DEGREE OF PROTECTION OF THE PUMP	IP	67		55
POWER ABSORBED	W	500		1100 - 3000
POWER SUPPLY	VAC	230V 50 HZ		380V 50 HZ
POWER SUPPLY OF THE LED	VDC		24	
TEMPERATURE OF WORK	°C		-20 / + 80	
ROHS REQUIREMENTS			•	
HEIGHT OF THE ROAD BLOCKER	MM	500	800	1000
SPEED OF ASCENT	SEC		5	
SPEED OF DESCENT	SEC		4	

• = standard equipment

L	500	800	1000
2000 mm	0352204120	0352504120	0352704120
Kg			1.420
3000 mm	0352204130	0352504130	0352704130
Kg			2.100