


C140A



AUTOMATIC BOLLARD

- HYDRAULIC MOVEMENT
- BUILT-IN HYDRAULIC UNIT
- FORMWORK AND STRUCTURE HOT DIP GALVANIZED
- LED INCLUDED
- SQUARE LOCK 10X10
- 200 mm BURIED TUBE
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

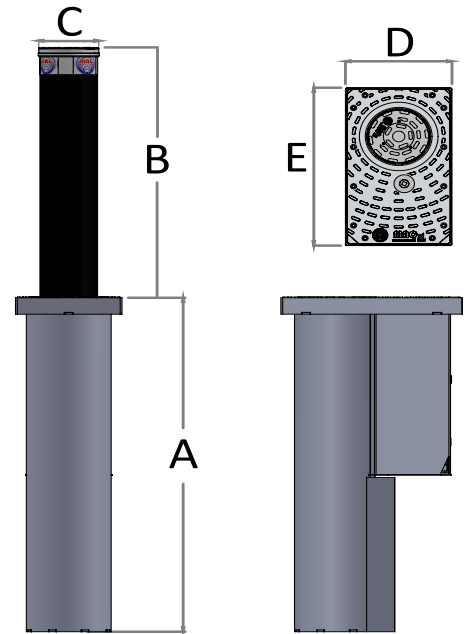

U.M. = mm				
A	B	C	D	E
731	500	140	260	443
931	700			

		C140A	C140A	C140A I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	140		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
TREATMENT FORMWORK AND STRUCTURE		HOT DIP GALVANIZATION		
REFLECTIVE STRIP		•		
RESISTANCE TO BREAKAGE	J	112.000	56.000	70.000
RESISTANCE TO DEFORMATION	J	5.000	3.000	4.000
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000		
DAILY CYCLES INTENSIVE USE	N°	2.400		
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE	N°	1.500.000		
MAXIMUM PRESSURE OF WORK	bar	30		
CAPACITY OF THE PUMP	L	4 - 5		
DEGREE OF PROTECTION OF THE PUMP	IP	67		
POWER ABSORBED	W	500		
POWER SUPPLY	Vac	230V 50HZ		
POWER SUPPLY OF THE LED	Vdc	24		
TEMPERATURE OF WORK	°C	-20 / + 80		
ROHS REQUIREMENTS		•		

• = standard equipment

C140A H500		030141212	030140402	030140452
HEIGHT FROM THE GROUND	mm	500		
RAISING TIME	sec	4,2		
LOWERING TIME	sec	3,7		
WEIGHT	Kg	75	51	56
C140A H700		030141214	030140404	030140454
HEIGHT FROM THE GROUND	mm	700		
RAISING TIME	sec	5,7		
LOWERING TIME	sec	4,8		
WEIGHT	Kg	86	63	68