


# C140F



## FIXED BOLLARD BY BRICKWORK

- 200 mm BURIED TUBE
- CUSTOM CONFIGURATION

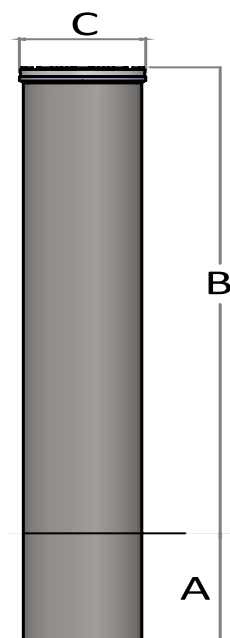

U.M. = mm		
A	B	C
200	500	140
	700	

		C140F	C140F	C140F I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	140		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
REFLECTIVE STRIP		•		
BREAKOUT RESISTANCE	J	482.000	270.000	290.000
IMPACT RESISTANCE	J	60.000	30.000	50.000

• = standard equipment

C140F H500		034841212	034840402	034840452
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	23	5	10
C140F H500		034341212	034340402	034340452
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	26	8	13
C140F H700		034841214	034840404	034840454
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	35	10	15
C140F H700		034341214	034340404	034340454
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	38	13	18