


# C140F-E



## FIXED BOLLARD BY EXTERNAL FLANGE

◦ CUSTOM CONFIGURATION

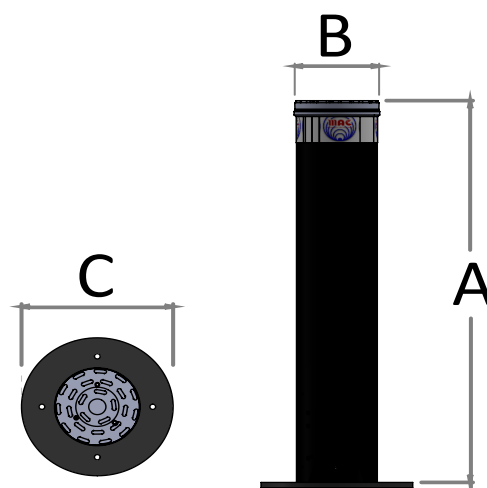

U.M. = mm		
A	B	C
500	140	264
700		

		C140F-E	C140F-E	C140F-E I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	140		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
REFLECTIVE STRIP		•		
BREAKOUT RESISTANCE	J	90.000	45.000	79.000
IMPACT RESISTANCE	J	4.000	2.000	3.000

• = standard equipment

<b>C140F-E H500</b>		<b>034741212</b>	<b>034740402</b>	<b>034740452</b>
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	23	7	9
<b>C140F-E H500</b>		<b>034241212</b>	<b>034240402</b>	<b>034240452</b>
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	26	8	10
<b>C140F-E H700</b>		<b>034741214</b>	<b>034740404</b>	<b>034740454</b>
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	32	11	13
<b>C140F-E H700</b>		<b>034241214</b>	<b>034240404</b>	<b>034240454</b>
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	35	14	16