


C200A



AUTOMATIC BOLLARD

- HYDRAULIC MOVEMENT
- BUILT-IN HYDRAULIC UNIT
- FORMWORK AND STRUCTURE HOT DIP GALVANIZED
- LED INCLUDED
- SQUARE LOCK 10X10
- 200 mm BURIED TUBE
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

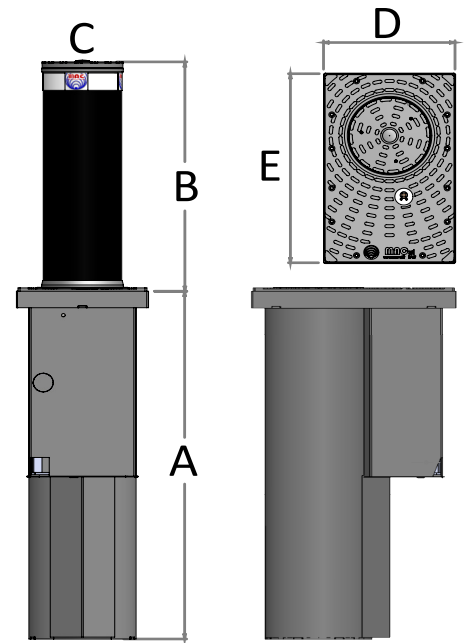

U.M. = mm				
A	B	C	D	E
731	500	200	328	508
931	700			
1031	800			

		C200A	C200A	C200A I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	200		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
TREATMENT FORMWORK AND STRUCTURE		HOT DIP GALVANIZATION		
REFLECTIVE STRIP		•		
RESISTANCE TO BREAKAGE	J	242.000	111.000	180.000
RESISTANCE TO DEFORMATION	J	20.000	7.000	10.000
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000		
DAILY CYCLES INTENSIVE USE	N°	2.400		
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE	N°	1.500.000		
MAXIMUM PRESSURE OF WORK	bar	30		
CAPACITY OF THE PUMP	L	4 - 5		
DEGREE OF PROTECTION OF THE PUMP	IP	67		
POWER ABSORBED	W	500		
POWER SUPPLY	Vac	230V 50HZ		
POWER SUPPLY OF THE LED	Vdc	24		
TEMPERATURE OF WORK	°C	-20 / + 80		
ROHS REQUIREMENTS		•		

• = standard equipment

		030151212	030150402	030150452
C200A H500				
HEIGHT FROM THE GROUND	mm	500		
RAISING TIME	sec	4,2		
LOWERING TIME	sec	3,7		
WEIGHT	Kg	98	68	74

		030151214	030150404	030150454
C200A H700				
HEIGHT FROM THE GROUND	mm	700		
RAISING TIME	sec	5,7		
LOWERING TIME	sec	4,8		
WEIGHT	Kg	117	74	80

		030151215	030150405	030150455
C200A H800				
HEIGHT ON THE GROUND	mm	800		
RAISING TIME	sec	6,6		
LOWERING TIME	sec	5,3		
WEIGHT	Kg	125	77	83