


# C200F



## FIXED BOLLARD BY BRICKWORK

- 200 mm BURIED TUBE
- CUSTOM CONFIGURATION

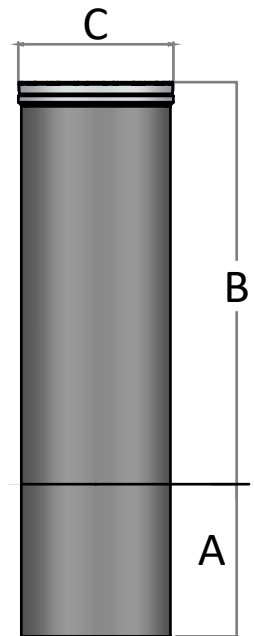

U.M. = mm		
A	B	C
200	500	200
	700	

		C200F	C200F	C200F I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	200		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
REFLECTIVE STRIP		•		
BREAKOUT RESISTANCE	J	242.000	111.000	180.000
IMPACT RESISTANCE	J	15.000	5.000	10.000

• = standard equipment

C200F H500		034851212	034850402	034850452
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	32	11	13
C200F H500		034351212	034350402	034350452
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	35	14	16
C200F H700		034851214	034850404	034850454
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	48	16	18
C200F H700		034351214	034350404	034350454
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	51	19	21