


C200F-E



FIXED BOLLARD BY EXTERNAL FLANGE

◦ CUSTOM CONFIGURATION

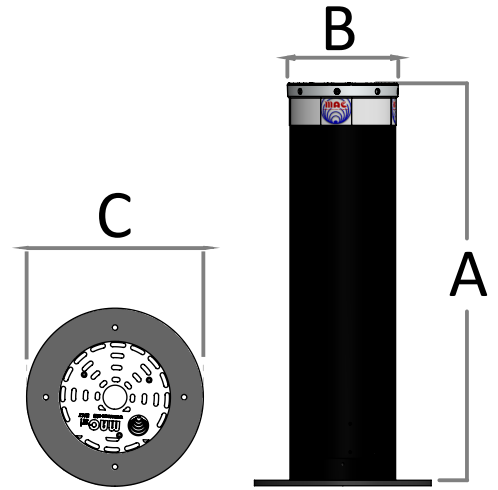

U.M. = mm		
A	B	C
500	200	326
700		

		C200F-E	C200F-E	C200F-E I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	200		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
REFLECTIVE STRIP		•		
BREAKOUT RESISTANCE	J	194.000	89.000	93.000
IMPACT RESISTANCE	J	12.000	4.000	7.000

• = standard equipment

C200F-E H500		034751212	034750402	034750452
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	32	11	13
C200F-E H500		034251212	034250402	034250452
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	35	14	16
C200F-E H700		034751214	034750404	034750454
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	48	17	19
C200F-E H700		034251214	034250404	034250454
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	51	20	22