


C275F



FIXED BOLLARD BY BRICKWORK

- 200 mm BURIED TUBE
- CUSTOM CONFIGURATION

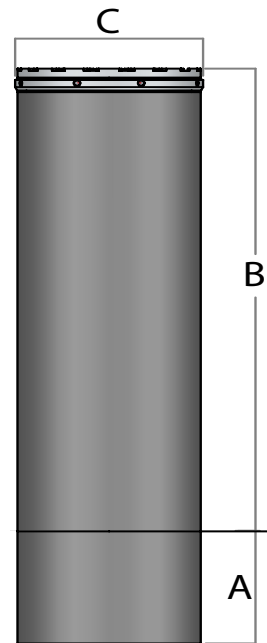

U.M. = mm		
A	B	C
200	500	275
	700	

		C275F	C275F	C275F I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	275		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
REFLECTIVE STRIP		•		
BREAKOUT RESISTANCE	J	482.000	270.000	290.000
IMPACT RESISTANCE	J	60.000	30.000	50.000

• = standard equipment

C275F H500		034861212	034860402	034860452
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	28	19	23
C275F H500		034361212	034360402	034360452
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	61	22	26
C275F H700		034861214	034860404	034860454
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	75	26	31
C275F H700		034361214	034360404	034360454
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	78	29	34