


# C275F-E



## FIXED BOLLARD BY EXTERNAL FLANGE

◦ CUSTOM CONFIGURATION

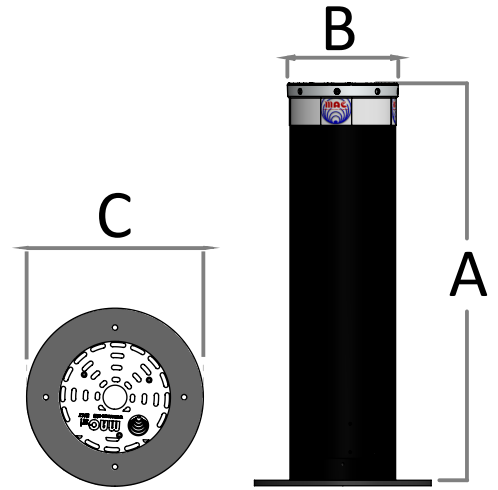

U.M. = mm		
A	B	C
500	275	471
700		

		C275F-E	C275F-E	C275F-E I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	275		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
REFLECTIVE STRIP		•		
BREAKOUT RESISTANCE	J	386.000	180.000	200.000
IMPACT RESISTANCE	J	20.000	9.000	10.000

• = standard equipment

<b>C275F-E H500</b>		<b>034761212</b>	<b>034760402</b>	<b>034760452</b>
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	58	19	22
<b>C275F-E H500</b>		<b>034261212</b>	<b>034260402</b>	<b>034260452</b>
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	61	22	24
<b>C275F-E H700</b>		<b>034761214</b>	<b>034760404</b>	<b>034760454</b>
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	77	28	26
<b>C275F-E H700</b>		<b>034261214</b>	<b>034260404</b>	<b>034260454</b>
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	80	31	33