


C275F-I



FIXED BOLLARD BY INTERNAL FLANGE

◦ CUSTOM CONFIGURATION

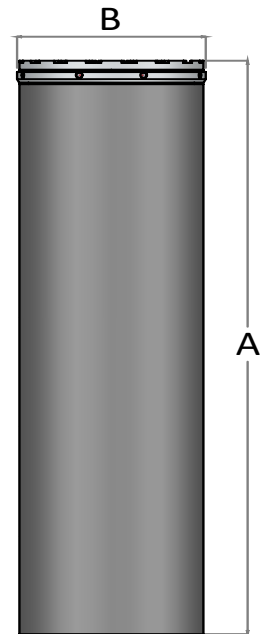

U.M. = mm	
A	B
500	275
700	

		C275F	C275F-I	C275F-I I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	275		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
REFLECTIVE STRIP		•		
BREAKOUT RESISTANCE	J	337.000	157.000	175.000
IMPACT RESISTANCE	J	18.000	8.000	10.000

• = standard equipment

C275F-I H500		034661212	034660402	034660452
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	58	19	23
C275F-I H500		034161212	034160402	034160452
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	61	22	26
C275F-I H700		034661214	034660404	034660454
WEIGHT OF THE BOLLARD WITH FLAT HEAD	Kg	75	26	31
C275F-I H700		034161214	034160404	034160454
WEIGHT OF THE BOLLARD WITH ALUMINIUM HEAD	Kg	78	29	34