


CRONO P115



AUTOMATIC ROAD BLOCKER

- HYDRAULIC MOVEMENT
- BUILT-IN HYDRAULIC SYSTEM
- LED
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

MODULAR PRODUCT

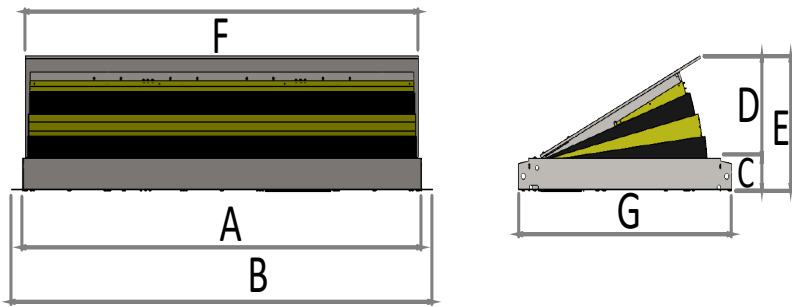

U.M. = mm						
A	B	C	D	E	F	G
960	1060	115	500	615	923	1040
1960	2060		700	815	1923	1100
2960	3060				2923	

CRONO P115 H500		CRONO P115 H700	
MATERIAL OF MOVING PLATE		S235JRC	
TREATMENT OF FORMWORK, STRUCTURE AND MOVING PART		HOT DIP GALVANIZATION	
FINISH OF MOVING PLATE		POWDER PAINT	
REFLECTIVE STRIP		•	
BREAKOUT RESISTANCE	J	850.000	1.000.000
IMPACT RESISTANCE	J	250.000	
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000	
DAILY CYCLES INTENSIVE USE	N°	2.400	
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE	N°	1.500.000	
MAXIMUM PRESSURE OF WORK	bar	30	
BUILT-IN HYDRAULIC PUMP		•	
DEGREE OF PROTECTION OF THE PUMP	IP	67	
POWER ABSORBED	W	550	
POWER SUPPLY	Vac	220V / 380 V 50 Hz	
POWER SUPPLY OF THE LED	Vdc	24	
TEMPERATURE OF WORK	°C	-20 +80	
ROHS REQUIREMENTS		•	
RAISING TIME	sec	7	8
LOWERING TIME	sec	6	7

• = standard equipment

L 1.000 mm	0353211110	0353411110
Kg	200	260
L 2.000 mm	0353211120	0353411120
Kg	385	450
L 3.000 mm	0353211130	0353411130
Kg	570	630