


# J275A



## AUTOMATIC BOLLARD

- HYDRAULIC MOVEMENT
- BUILT-IN HYDRAULIC UNIT
- FORMWORK AND STRUCTURE HOT DIP GALVANIZED
- LED INCLUDED
- SQUARE LOCK 10X10
- 400 mm BURIED TUBE
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

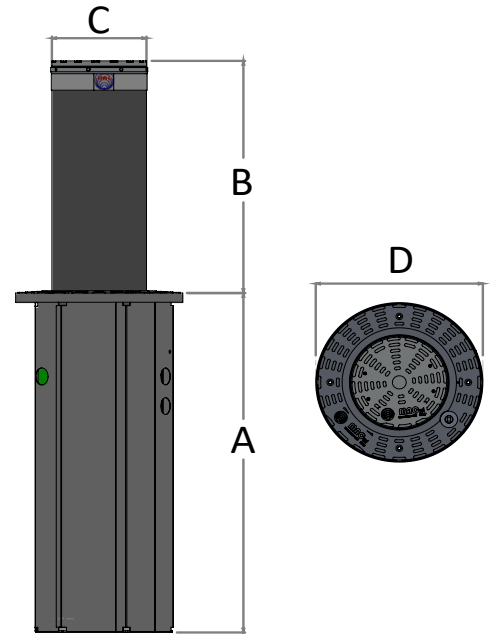

U.M. = mm			
A	B	C	D
1231	800	275	484
1431	1000		

		J275A	J275A I
THICKNESS OF THE TUBE	mm	12,5	12
DIAMETER OF THE TUBE	mm	275	
MATERIAL OF THE TUBE		S335JRC	AISI 304
TREATMENT AND FINISH OF THE TUBE		GALVANIZATION + POWDER PAINT	BRUSHED
TREATMENT FORMWORK AND STRUCTURE		HOT DIP GALVANIZATION	
REFLECTIVE STRIP		•	
RESISTANCE TO BREAKAGE	J	760.000	770.000
RESISTANCE TO DEFORMATION	J	255.000	265.000
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000	
DAILY CYCLES INTENSIVE USE		2.400	
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE		1.500.000	
MAXIMUM PRESSURE OF WORK	bar	30	
CAPACITY OF THE PUMP	L	4	
DEGREE OF PROTECTION OF THE PUMP	IP	67	
POWER ABSORBED	W	550	
POWER SUPPLY	Vac	230V 50HZ	
POWER SUPPLY OF THE LED	Vdc	24	
TEMPERATURE OF WORK	°C	-20 / + 80	
ROHS REQUIREMENTS		•	

• = standard equipment

J275A H800		030961215	030961255
HEIGHT FROM THE GROUND	mm	800	
RAISING TIME	sec	8,4	
LOWERING TIME	sec	7,2	
WEIGHT	Kg	210	220

J275A H1000		030961217	030961257
HEIGHT FROM THE GROUND	mm	1.000	
RAISING TIME	sec	10,5	
LOWERING TIME	sec	9,4	
WEIGHT	Kg	245	260