

K275A-M40





DESIGNED ACCORDING TO



M40 COMPLIANT AUTOMATIC BOLLARD

- HYDRAULIC MOVEMENT
- BUILT-IN HYDRAULIC UNIT
- FORMWORK AND STRUCTURE HOT DIP GALVANIZED
- LED INCLUDED
- SQUARE LOCK 10X10
- 500 mm BURIED TUBE
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

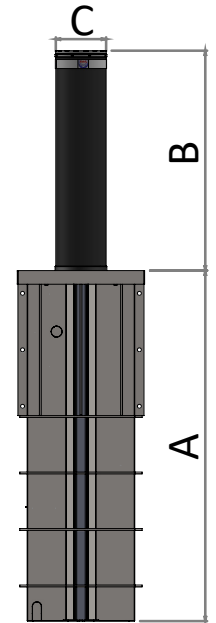

| | | U.M. = mm | | | | |
|-----|------|-----------|-----|-----|----|--|
| M40 | A | B | C | D | ϕ | |
| | 1532 | 900 | 275 | 695 | 16 | |
| | 1632 | 1000 | | | | |

| | | K275A-M40 | K275A-M40 EFO | K275A-M40 I | K275A-M40 I EFO |
|--|-----|------------------------------|---------------|-------------|-----------------|
| THICKNESS OF THE TUBE | mm | 16 | | | |
| DIAMETER OF THE TUBE | mm | 275 | | | |
| MATERIAL OF THE TUBE | | S335JRC | | AISI 304 | |
| TREATMENT AND FINISH OF THE TUBE | | GALVANIZATION + POWDER PAINT | | BRUSHED | |
| TREATMENT FORMWORK AND STRUCTURE | | HOT DIP GALVANIZATION | | | |
| REFLECTIVE STRIP | | • | | | |
| RESISTANCE TO BREAKAGE | J | 1.200.000 | | | |
| RESISTANCE TO DEFORMATION | J | 700.000 | | | |
| STATIC RESISTANCE (CERTIFIED D400) | Kg | 40.000 | | | |
| DAILY CYCLES INTENSIVE USE (INTERMITTENT CYCLE S3) | N° | 2.400 | | | |
| AVERAGE LIFE CYCLES WITHOUT MAINTENANCE | N° | 3.500.000 | | | |
| MAXIMUM PRESSURE OF WORK | bar | 140 | | | |
| CAPACITY OF THE PUMP | L | 7 | | | |
| DEGREE OF PROTECTION OF THE PUMP | IP | 67 | | | |
| POWER ABSORBED | W | 1.250 | | | |
| POWER SUPPLY | Vac | 230 / 380 | | | |
| POWER SUPPLY OF THE LED | Vdc | 24 | | | |
| TEMPERATURE OF WORK (FROM -10 USE HEATER) | °C | -20 / + 80 | | | |
| ROHS REQUIREMENTS | | • | | | |

• = standard equipment

| K275A-M40 H900 | | 030462016 | 030462016E | 030462056 | 030462056E |
|------------------------|-----|-----------|------------|-----------|------------|
| HEIGHT FROM THE GROUND | mm | 900 | | | |
| RAISING TIME | sec | 5 | | | |
| LOWERING TIME | sec | 2 - 5 | | | |
| RAISING TIME WITH EFO | sec | 1 - 1,2 | | | |
| WEIGHT | Kg | 650 | 680 | 660 | 690 |

| K275A-M40 H1000 | | 030462017 | 030462017E | 030462057 | 030462057E |
|------------------------|-----|-----------|------------|-----------|------------|
| HEIGHT FROM THE GROUND | mm | 1.000 | | | |
| RAISING TIME | sec | 6 | | | |
| LOWERING TIME | sec | 2 - 5 | | | |
| RAISING TIME WITH EFO | sec | 1 - 1,2 | | | |
| WEIGHT | Kg | 700 | 730 | 710 | 740 |