

K275A-M50




CRASH RATED



M50 CERTIFIED AUTOMATIC BOLLARD

- HYDRAULIC MOVEMENT
- BUILT-IN HYDRAULIC UNIT
- FORMWORK AND STRUCTURE HOT DIP GALVANIZED
- LED INCLUDED
- SQUARE LOCK 10X10
- 600 mm BURIED TUBE
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

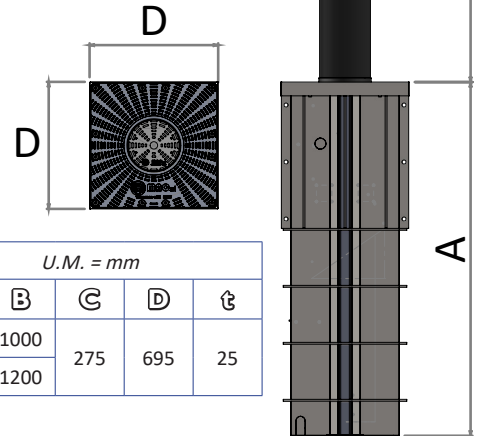

		U.M. = mm				
		A	B	C	D	±
M50	1732	1000	275	695	25	
	1932	1200				

		K275A-M50	K275A-M50 EFO	K275A-M50 I	K275A-M50 I EFO
THICKNESS OF THE TUBE	mm	25			
DIAMETER OF THE TUBE	mm	275			
MATERIAL OF THE TUBE		S335JRC		AISI 304	
TREATMENT AND FINISH OF THE TUBE		GALVANIZATION + POWDER PAINT		BRUSHED	
TREATMENT FORMWORK AND STRUCTURE		HOT DIP GALVANIZATION			
REFLECTIVE STRIP		•			
RESISTANCE TO BREAKAGE	J	2.000.000			
RESISTANCE TO DEFORMATION	J	750.000			
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000			
DAILY CYCLES INTENSIVE USE (INTERMITTENT CYCLE S3)	N°	2.400			
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE	N°	3.500.000			
MAXIMUM PRESSURE OF WORK	bar	140			
CAPACITY OF THE PUMP	L	14			
DEGREE OF PROTECTION OF THE PUMP	IP	67			
POWER ABSORBED	W	2 x 1.250			
POWER SUPPLY	Vac	230 / 380			
POWER SUPPLY OF THE LED	Vdc	24			
TEMPERATURE OF WORK (FROM -10 USE HEATER)	°C	-20 / + 80			
ROHS REQUIREMENTS		•			

• = standard equipment

		030562517	030562517E	030562557	030562557E
K275A-M50 H1000					
HEIGHT FROM THE GROUND	mm	1.000			
RAISING TIME	sec	5			
LOWERING TIME	sec	2 - 5			
RAISING TIME WITH EFO	sec	1 - 1,2			
WEIGHT	Kg	820	850	815	845

		030562518	030562518E	030562558	030562558E
K275A-M50 H1200					
HEIGHT FROM THE GROUND	mm	1.200			
RAISING TIME	sec	7			
LOWERING TIME	sec	2 - 6			
RAISING TIME WITH EFO	sec	1 - 1,2			
WEIGHT	Kg	890	920	885	915