

K275F-M30




DESIGNED ACCORDING TO



M30 FIXED COMPLIANT BOLLARD

◦ 400 mm BURIED TUBE

M30	U.M. = mm					
	A	B	C	D	E	t
400	800	275	835	740	12,5	
	1000					

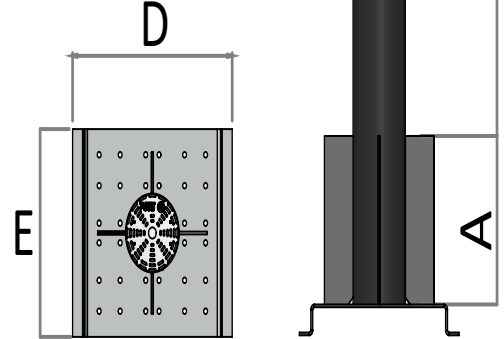

		K275F-M30	K275F-M30 I
THICKNESS OF THE TUBE	mm	12,5	12
DIAMETER OF THE TUBE	mm	275	
MATERIAL OF THE TUBE		S335JRC	AISI 304
TREATMENT OF THE TUBE		HOT DIP GALVANIZATION	
FINISH OF THE TUBE		POWDER PAINT	BRUSHED
REFLECTIVE STRIP		•	
RESISTANCE TO BREAKAGE	J	760.000	
RESISTANCE TO DEFORMATION	J	255.000	

• = standard equipment

K275F-M30 H800		034461215	034461255
WEIGHT	Kg	265	270
K275F-M30 H1000		034461217	034461257
WEIGHT	Kg	298	303