

K275F-M40




DESIGNED ACCORDING TO



M40 FIXED COMPLIANT BOLLARD

◦ 500 mm BURIED TUBE

M40	U.M. = mm					
	A	B	C	D	E	t
500	900	275	835	740	16	
	1000					

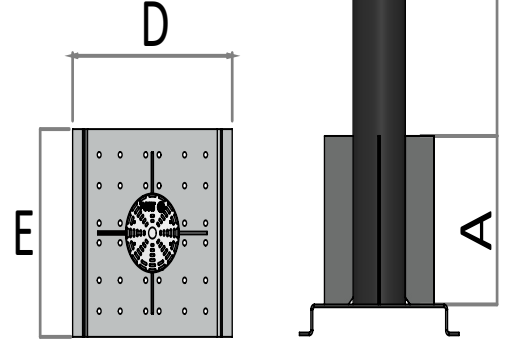

		K275F-M40	K275F-M40 I
THICKNESS OF THE TUBE	mm	16	
DIAMETER OF THE TUBE		275	
MATERIAL OF THE TUBE		S335JRC	AISI 304
TREATMENT OF THE TUBE		HOT DIP GALVANIZATION	
FINISH OF THE TUBE		POWDER PAINT	BRUSHED
REFLECTIVE STRIP		•	
RESISTANCE TO BREAKAGE		1.200.000	
RESISTANCE TO DEFORMATION		700.000	

• = standard equipment

K275F-M40 H900		034962016	034962056
WEIGHT	Kg	295	300
K275F-M40 H1000		034962017	034962057
WEIGHT	Kg	315	320