

K275F-M50




DESIGNED ACCORDING TO



M50 FIXED COMPLIANT BOLLARD

◦ 600 mm BURIED TUBE

M50	U.M. = mm					
	A	B	C	D	E	t
600	1000	275	835	740	25	
	1200					

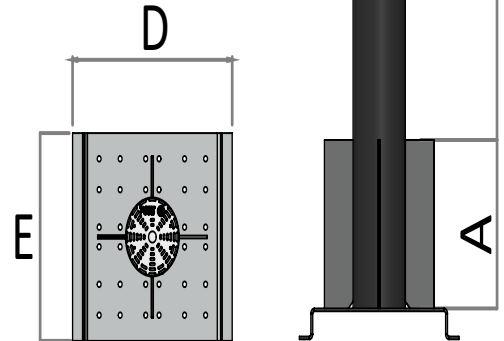

		K275F-M50	K275F-M50 I
THICKNESS OF THE TUBE	mm	25	
DIAMETER OF THE TUBE	mm	275	
MATERIAL OF THE TUBE		S335JRC	AISI 304
TREATMENT OF THE TUBE		HOT DIP GALVANIZATION	
FINISH OF THE TUBE		POWDER PAINT	BRUSHED
REFLECTIVE STRIP		•	
RESISTANCE TO BREAKAGE	J	2.000.000	
RESISTANCE TO DEFORMATION	J	750.000	

• = standard equipment

K275F-M50 H1000		034562517	034562557
WEIGHT	Kg	330	335
K275F-M50 H1200		034562518	034562558
WEIGHT	Kg	392	397