




MRB300



AUTOMATIC MINI ROAD BLOCKER

- HYDRAULIC MOVEMENT
- LED
- BUILT-IN HYDRAULIC SYSTEM
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

U.M. = mm				
A	B	C	D	E
1200	400	300	700	210

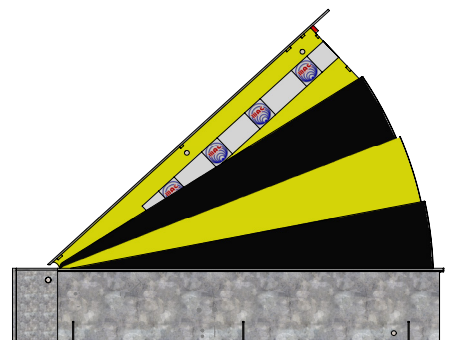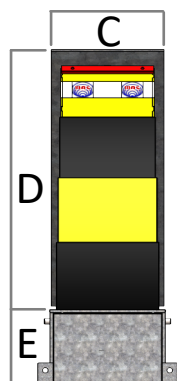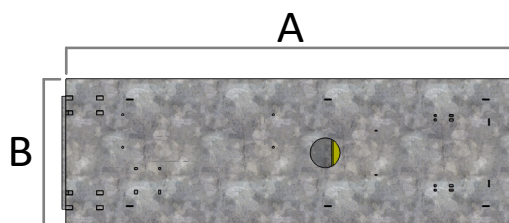

MRB300 H700		
MATERIAL MOVING PLATE		S335JRC
THICKNESS OF THE MOVING PLATES	mm	10
TREATMENT OF FORMWORK, STRUCTURE AND MOVING PART		HOT DIP GALVANIZATION
FINISH OF MOVING PLATE		POWDER PAINT
REFLECTIVE STRIP		•
BREAKOUT RESISTANCE	J	480.000
IMPACT RESISTANCE	J	5.000
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000
DAILY CYCLES INTENSIVE USE	Nº	2.400
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE	Nº	1.500.000
MAXIMUM PRESSURE OF WORK	bar	40
BUILT-IN HYDRAULIC PUMP		•
DEGREE OF PROTECTION OF THE PUMP	IP	67
POWER ABSORBED	W	550
POWER SUPPLY	Vac	220V 50 Hz
POWER SUPPLY OF THE LED	Vdc	24
TEMPERATURE OF WORK	°C	-20 / + 80
ROHS REQUIREMENTS		•

• = standard equipment

MRB300 H700		0351402203
HEIGHT FROM THE GROUND	mm	700
RAISING TIME	sec	4,8
LOWERING TIME	sec	4,4
WEIGHT	Kg	130