
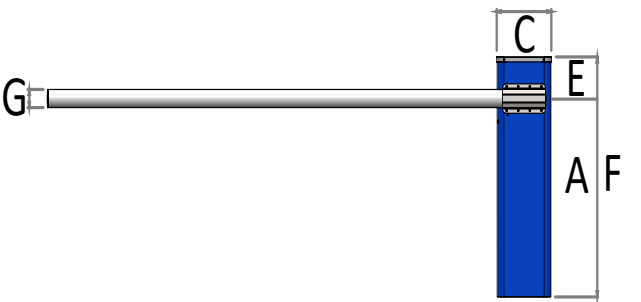


SBM206



U.M. = mm						
A	B	C	D	E	F	G
875	205	330	298	184	1059	Ø 80

SBM206		
MATERIAL OF THE STRUCTURE		S235JRC
FINISH OF THE PLATES		POWDER PAINT
DAILY CYCLES BOOM UP TO 3M	N°	300
DAILY CYCLES BOOM FROM 4 TO 6M	N°	100
POWER ABSORBED	W	250
POWER SUPPLY	Vac	220
LED POWER SUPPLY	Vcc	24
OPEN/CLOSE SPEED	sec	6
TEMPERATURE OF WORK	°C	-20 / + 60
WEIGHT	Kg	45
ROHS REQUIREMENTS		•

• = standard equipment

BARRIER	046212060	
FIXED SUPPORT	046810010	
MOVING SUPPORT	046810000	
PHOTOCELL	1630026	
GROUND MOUNTING BASE + THREADED RODS	046832060	

	L2000	L3000	L4000	L5000	L6000
BOOM	046780802	046780803	046780804	046780805	046780806