


SBM408



AUTOMATIC BARRIER

- INVERTER
- CONTROL BOARD
- THREE-PHASE MOTOR
- LED INCLUDED
- CUSTOM CONFIGURATION

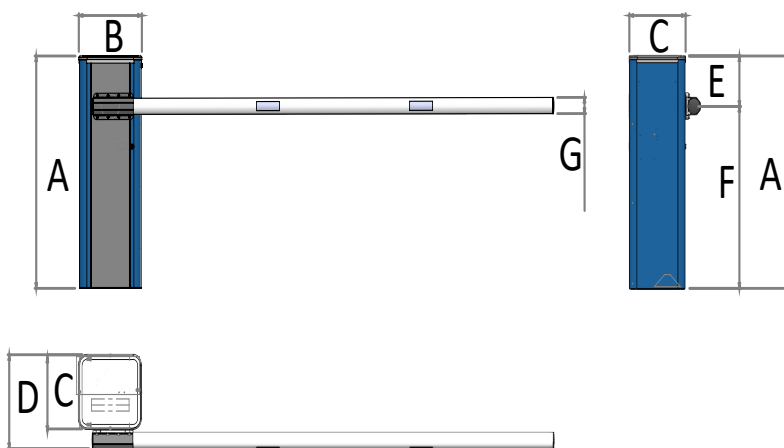

U.M. = mm						
A	B	C	D	E	F	G
1151	412	368	265	250	901	Ø 80

SBM408		
MATERIAL OF THE STRUCTURE		S335JRC
TREATMENT OF THE STRUCTURE		HOT DIP GALVANIZATION
FINISH OF THE PLATES		POWDER PAINT
DAILY CYCLES BOOM UP TO 3M	N°	9.000
DAILY CYCLES BOOM FROM 4 TO 6M	N°	4.500
TENSION MONO-PHASE INPUT	Vac	220
INVERTER WITH THREE-PHASE OUTPUT	Vac	220
LED POWER SUPPLY	Vcc	24
OPEN/CLOSE SPEED	sec	1 - 6
TEMPERATURE OF WORK	°C	-20 / + 60
WEIGHT	Kg	110
ARM ROTATION		LIMIT SWITCH OR ENCODER
ROHS REQUIREMENTS		•

• = standard equipment

BARRIER	046114080	
FIXED SUPPORT	046810010	
MOVING SUPPORT	046810000	
PHOTOCELL	1630026	
GROUND MOUNTING BASE + THREADED RODS	046834080	

		L2000	L3000	L4000	L5000	L6000
BOOM		046780802	046780803	046780804	046780805	046780806
SPRING		04710600703450	04710600703450	04710700703450	04710700703450	04710800703450
	Q.	1	1	1	2	2