


TK08A-I

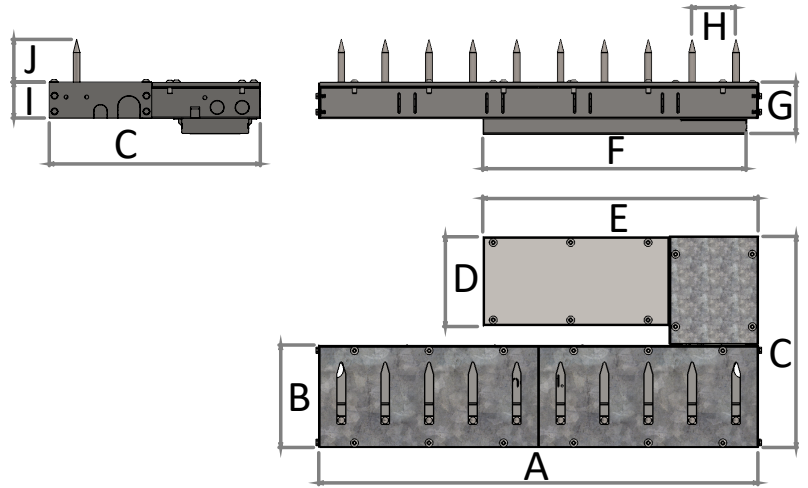

BUILT-IN AUTOMATIC TYRE KILLER

- HYDRAULIC MOVEMENT
- 80 mm SS SPURS
- HYDRAULIC SYSTEM: OPTIONAL
- CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

MODULAR PRODUCT

U.M. = mm									
A	B	C	D	E	F	G	H	I	J
1003	234	482	205	623	602	117	100	82	100

TK08A-I		
HEIGHT OF THE SPURS	mm	80
THICKNESS OF COVER PLATES	mm	10
MATERIAL OF THE FORMWORK AND SPURS		AISI304
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000
DAILY CYCLES INTENSIVE USE		2.400
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE	N°	1.500.000
MAXIMUM PRESSURE OF WORK	bar	30
DEGREE OF PROTECTION OF THE PUMP	IP	67
POWER ABSORBED	W	550
POWER SUPPLY	Vac	230V 50HZ
TEMPERATURE OF WORK	°C	-20 / +80
ROHS REQUIREMENTS		•

• = standard equipment

	Kg	COD.
MASTER L1000	32	039203531-10M
SLAVE L1000	32	039203531-10
SLAVE L500	16	039203531-05
FORMWORK + CYLINDER + LIMIT SWITCHES	18	039204531-CF
FORMWORK + PUMP + CYLINDER	30	039204531-CPA
JOINT	1	039204531-GR
TERMINAL	1	039204531-TR

COMPOSITION EXAMPLE.

039204531-CPA	+	039204531-TR	+	039203531-10M	+	039204531-GR	+	039203531-10	+	039204531-TR	+	5050008602	5050008615	1503510
---------------	---	--------------	---	---------------	---	--------------	---	--------------	---	--------------	---	------------	------------	---------

COMPOSITION EXAMPLE (NO BUILT-IN PUMP):

039204531-CF	+	039204531-TR	+	039203531-10M	+	039204531-GR	+	039203531-10	+	039204531-TR	+	5935230103014	5935230103015	5935230103017
--------------	---	--------------	---	---------------	---	--------------	---	--------------	---	--------------	---	---------------	---------------	---------------