




TK10A-E



EXTERNAL AUTOMATIC TYRE KILLER

- HYDRAULIC MOVEMENT
- 10 mm SS SPURS
- HYDRAULIC SYSTEM: OPTIONAL
- CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

MODULAR PRODUCT

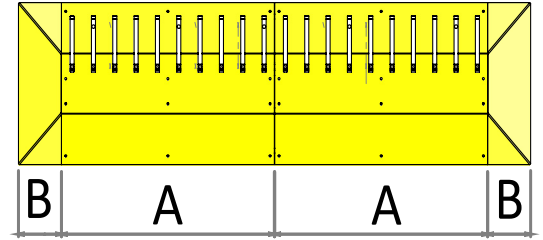

U.M. = mm					
A	B	C	D	E	F
1000	201	2400 3400	670	75	100

TK10A-E		
HEIGHT OF THE SPURS	mm	100
MATERIAL OF THE SPURS		AISI304
TREATMENT OF THE PLATES		HOT DIP GALVANIZATION
FINISH OF THE PLATES		POWDER PAINT
DAILY CYCLES INTENSIVE USE	N°	2.400
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE	N°	1.500.000
MAXIMUM PRESSURE OF WORK	bar	30
POWER ABSORBED	W	550
POWER SUPPLY	Vac	230V 50HZ
TEMPERATURE OF WORK	°C	-20 / +80
ROHS REQUIREMENTS		•

• = standard equipment

	Kg	COD.
L2000	130	039104552
L3000	193	039104553
TERMINAL	7,5	039804000
JOINT	0,5	0390202
CYLINDER + LIMIT SWITCH	8	039160050

COMPOSITION EXAMPLE:

039804000	+	039104552	+	0390202	+	039104553	+	039160050	+	039804000	+	5935230103014	5935230103015	5935230103017
-----------	---	-----------	---	---------	---	-----------	---	-----------	---	-----------	---	---------------	---------------	---------------