


C200R



REMOVABLE BOLLARD

- HEXAGONAL LOCK
- ALUMINIUM HEAD
- FORMWORK INCLUDED
- CUSTOM CONFIGURATION

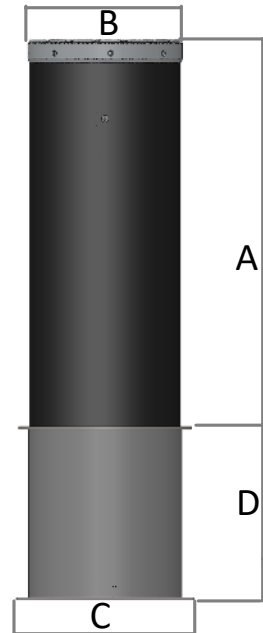

U.M. = mm			
A	B	C	D
500	200	245	314
700			

		C200R	C200R	C200R I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	200		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
REFLECTIVE STRIP		•		
BREAKOUT RESISTANCE	J	242.000	111.000	180.000
IMPACT RESISTANCE	J	30.000	10.000	10.000

• = standard equipment

C200R H500		032451212	032450402	032450452
WEIGHT	Kg	35	14	16
C200R H700		032451214	032450404	032450454
WEIGHT	Kg	51	19	21