


C275R



REMOVABLE BOLLARD

- HEXAGONAL LOCK
- ALUMINIUM HEAD
- FORMWORK INCLUDED
- CUSTOM CONFIGURATION

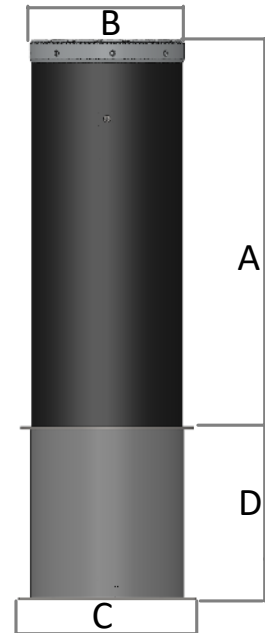

U.M. = mm			
A	B	C	D
500	275	315	314
700			

		C275R	C275R	C275R I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	275		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
REFLECTIVE STRIP		•		
BREAKOUT RESISTANCE	J	482.000	327.000	327.000
IMPACT RESISTANCE	J	60.000	55.000	55.000

• = standard equipment

C275R H500		032461212	032460402	032460452
WEIGHT	Kg	61	22	24
C275R H700		032461214	032460404	032460454
WEIGHT	Kg	78	29	31