


C140R



REMOVABLE BOLLARD

- HEXAGONAL LOCK
- ALUMINIUM HEAD
- FORMWORK INCLUDED
- CUSTOM CONFIGURATION

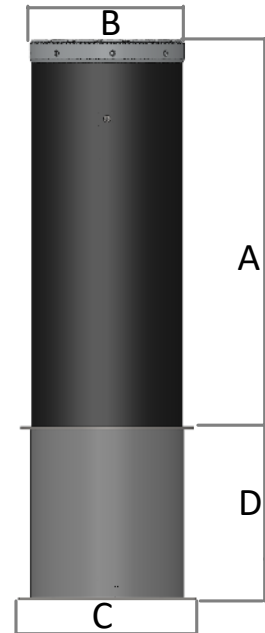

U.M. = mm			
A	B	C	D
500	140	185	314
700			

		C140R	C140R	C140R I
THICKNESS OF THE TUBE	mm	12,5	4	4
DIAMETER OF THE TUBE	mm	140		
MATERIAL OF THE TUBE		S335JRC	S235JRC	AISI304
TREATMENT AND FINISH OF THE TUBE		HOT DIP GALVANIZATION + POWDER PAINT		BRUSHED
REFLECTIVE STRIP		•		
BREAKOUT RESISTANCE	J	112.000	56.000	70.000
IMPACT RESISTANCE	J	7.500	5.000	5.000

• = standard equipment

C140R H500		032441212	032440402	032340452
WEIGHT	Kg	26	8	10
C140R H700		032441214	032440404	032440454
WEIGHT	Kg	35	10	15