


CRONO P300



AUTOMATIC ROAD BLOCKER

- HYDRAULIC MOVEMENT
- HYDRAULIC PISTON INCLUDED
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

MODULAR PRODUCT

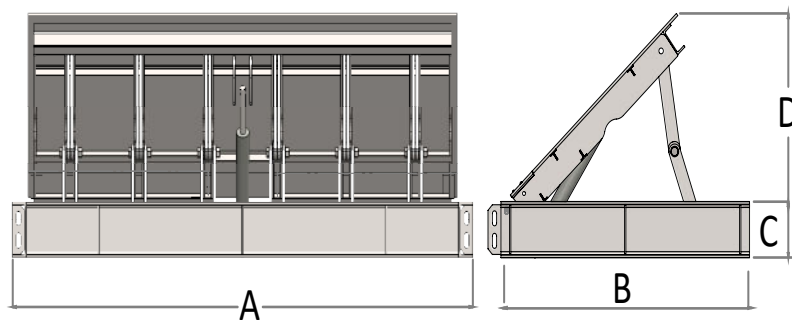

U.M. = mm			
A	B	C	D
2200	1520	298	800
3200	1820		1000

		H800	H1000
MATERIAL OF MOVING PLATE		S235JRC	
TREATMENT OF FORMWORK, STRUCTURE AND MOVING PART		HOT DIP GALVANIZATION	
REFLECTIVE STRIP		•	
BREAKOUT RESISTANCE	J	2.000.000	2.400.000
IMPACT RESISTANCE	J	200.000	
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000	
DAILY CYCLES INTENSIVE USE	N°	2.400	
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE	N°	1.500.000	
MAXIMUM PRESSURE OF WORK	bar	40-80	
POWER ABSORBED	W	1.100 - 3.000	
POWER SUPPLY	Vac	380V 50 HZ 3F+N	
TEMPERATURE OF WORK	°C	-20 +80	
ROHS REQUIREMENTS		•	
RAISING TIME	sec	7	8
LOWERING TIME	sec	6	7

• = standard equipment

L 2.000 mm	0352504120	0352704120
Kg	1.136	1.420
L 3.000 mm	0352504130	0352704130
Kg	1.680	2.100