




AUTOMATIC ROAD BLOCKER

- HYDRAULIC MOVEMENT
- HYDRAULIC PISTON INCLUDED
- LED
- ELECTRONIC CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

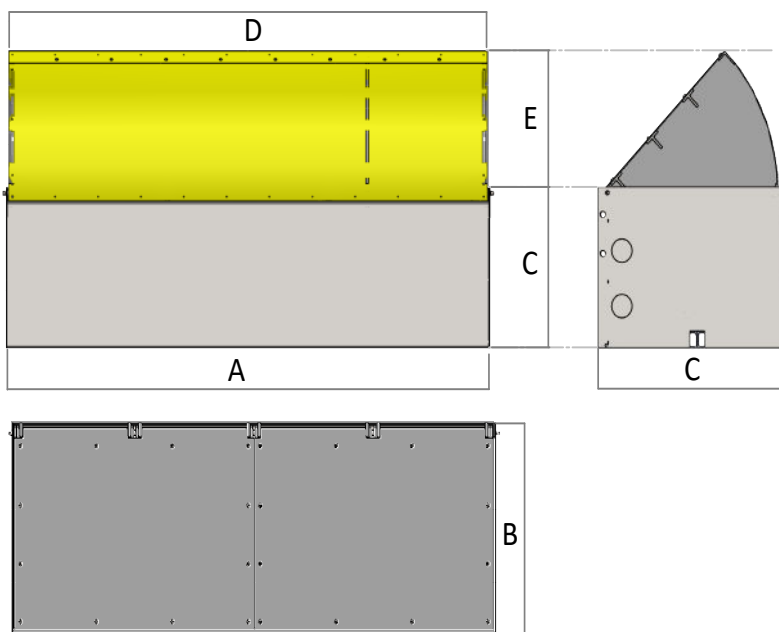

U.M. = mm				
A	B	C	D	E
L+26	1176	815	L-36	700
L+26	1650	1200	L-36	1000

		H700	H1000
MATERIAL OF MOVING PLATE		S235JRC	
TREATMENT OF FORMWORK, STRUCTURE AND MOVING PART		HOT DIP GALVANIZATION	
FINISH OF MOVING PLATE		POWDER PAINT	
REFLECTIVE STRIP		•	
BREAKOUT RESISTANCE	J	1.800.000	2.200.000
IMPACT RESISTANCE	J	200.000	
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000	
DAILY CYCLES INTENSIVE USE	N°	2.400	
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE	N°	1.500.000	
MAXIMUM PRESSURE OF WORK	bar	40-80	
BUILT-IN HYDRAULIC PUMP		OPTIONAL	
DEGREE OF PROTECTION OF THE PUMP	IP	55	
POWER ABSORBED	W	1.100 - 3.000	
POWER SUPPLY	Vac	380V 50 HZ 3F+N	
POWER SUPPLY OF THE LED	Vdc	24	
TEMPERATURE OF WORK	°C	-20 +80	
ROHS REQUIREMENTS		•	
RAISING TIME	sec	10	
LOWERING TIME	sec	7	

• = standard equipment

L 2.000 mm		0352401120	0352701120
Kg		725	1.035
L 3.000 mm		0352401130	0352701130
Kg		1.085	1.550
L 4.000 mm		0352401140	0352701140
Kg		1.175	1.678
L 5.000 mm		0352401150	0352701150
Kg		1.825	2.607
L 6.000 mm		0352401160	0352701160
Kg		2.170	3.100