
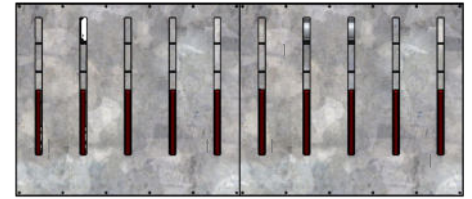
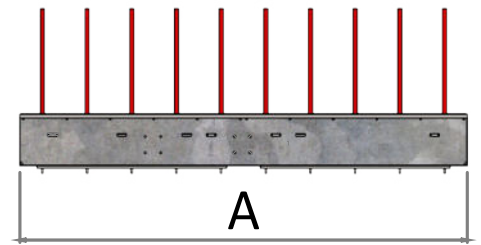


# TK45A-I



## BUILT-IN AUTOMATIC TYRE KILLER

- HYDRAULIC MOVEMENT
- 450 mm SPURS
- BUILT-IN HYDRAULIC SYSTEM
- CONTROL BOARD: OPTIONAL
- CUSTOM CONFIGURATION

MODULAR PRODUCT

U.M. = mm			
A	B	C	D
2036	820	220	450
3036			

TK45A-I		
HEIGHT OF SPURS	mm	450
MATERIAL OF THE SPURS		S235JRC
TREATMENT OF THE FORMWORK, SPURS AND COVER		HOT DIP GALVANIZATION
STATIC RESISTANCE (CERTIFIED D400)	Kg	40.000
DAILY CYCLES INTENSIVE USE	N°	2.400
AVERAGE LIFE CYCLES WITHOUT MAINTENANCE	N°	1.500.000
MAXIMUM PRESSURE OF WORK	bar	30
DEGREE OF PROTECTION OF THE PUMP	IP	67
POWER ABSORBED	W	550
POWER SUPPLY	Vac	230V 50HZ
TEMPERATURE OF WORK	°C	-20 / +80
ROHS REQUIREMENTS		•

• = standard equipment

L	Kg	COD.
TK45A-I L2000	315	039208152
TK45A-I L3000	470	039208153